


# 2x Series Double Sided Plastic Pressure Gauge

## Industry's First Plastic Gauge - No Filling Required 'Plug & Play'

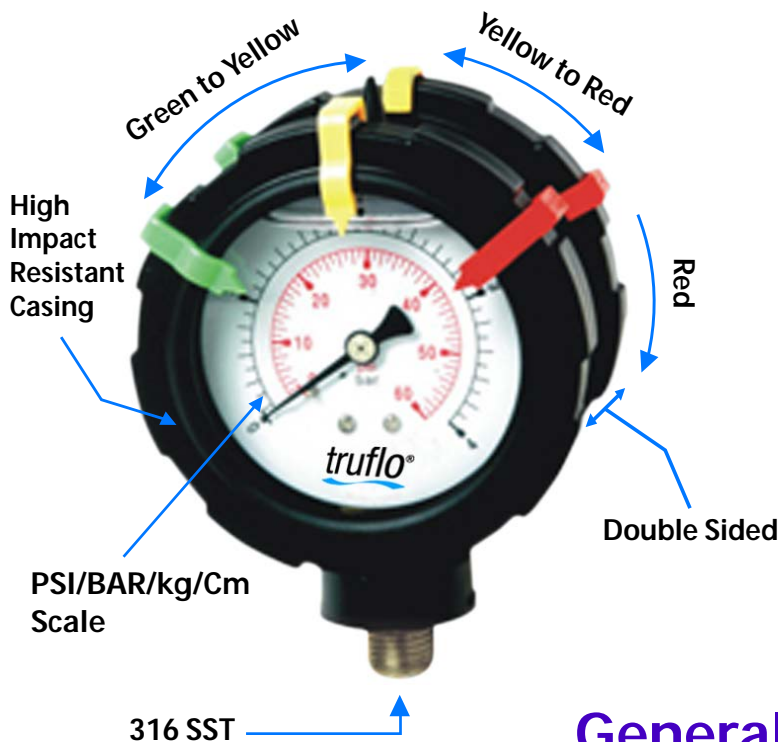


### Features

- Double Sided
- Fit & Forget
- Suitable for Corrosive Environments
- All Plastic & Gauge (Filled)
- Heavy Duty Design
- Completely Corrosion Resistant
- Extra Large Colored Display
- Highest Accuracy in Industry 1.5%
- Factory Pre-Filled Glycerin
- No Filling Required
- Visual Pressure Ranges
- Simple to Install
- Perfect Mate for Plastic Isolators


### General Data

| SPECIFICATION         | DESCRIPTION   |
|-----------------------|---|
| Dial Diameter         | Large 2½" (Big Numbers-Clear Markers)   |
| Mounting              | Direct Mount, Bottom Connection MNPT ¼"   |
| Housing               | PVDF or PP  |
| Lens                  | High Impact Polycarbonate - Double Sided  |
| Dial                  | Red & Black Scale White Background, dial arc 270°   |
| Gauge                 | Red, Yellow, Green Moveable Plastic Markers-Pressure Range Pointers Fitted on the Bezel                           |
| Connection            | ¼" MNPT   |
| Filling               | Options: Glycerin (Standard) Silicon Filled (Optional)  |
| Accuracy              | ±1.5% F.S.  |
| Operating temperature | Max. Working Temp. PVDF-195 F, PP-170° F  |
| Pressure Range        | Standard range <b>0-60 / 0-100 / 0-160</b> PSI (Second Scale: Bar)<br>Other units available, e.g., bar, MPa, etc. |

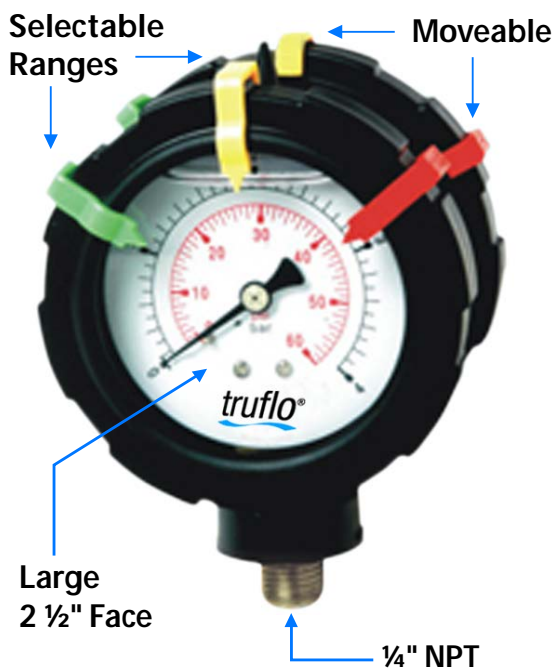




## HOW TO ORDER

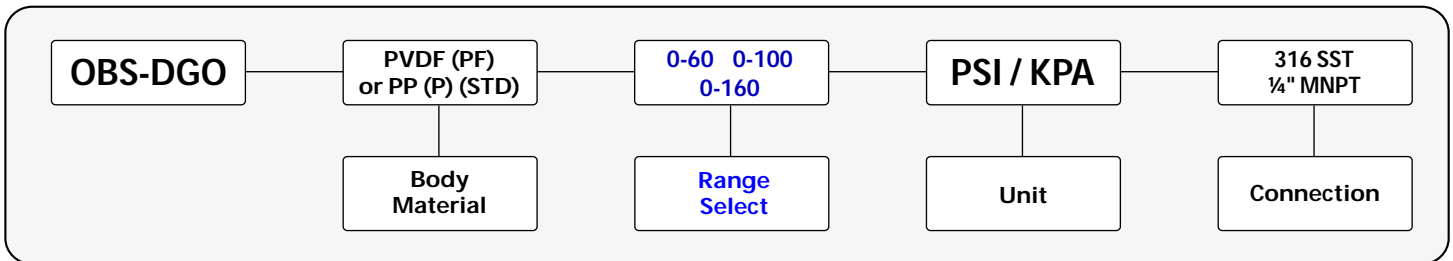

## OBS-DGO Series

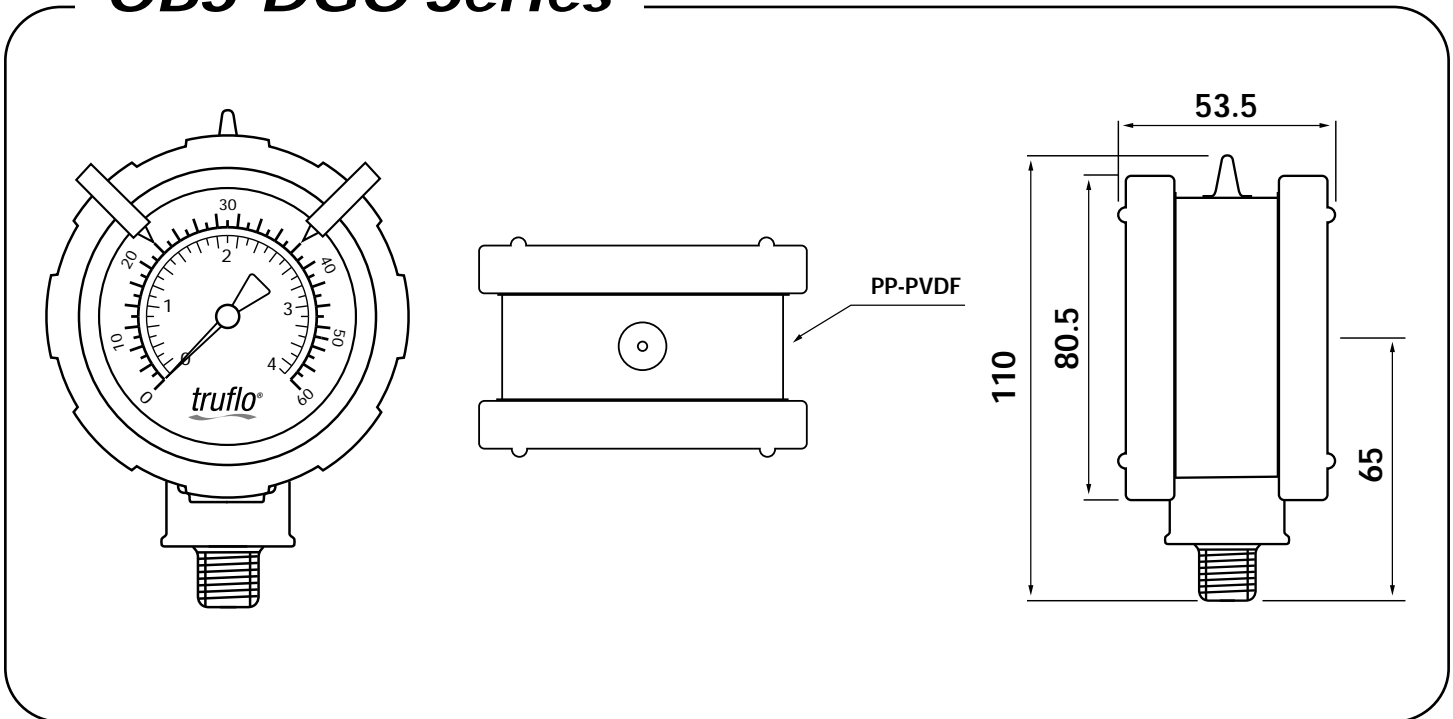

## Installation

Do not tighten by grasping the case of the gauge as this may cause damage.

1. Before installing a pressure gauge, consideration should be given to temperature, humidity, vibration, pulsation, shock and other climatic and ambient conditions of the service application, and to the possible need for protective attachments and / or special installation requirements.
2. The user shall ensure that the correct gauge has been selected with the correct range and construction.

